


**Model: IDPMB-08T**  
**8" Industrial Panel Monitor, with Touch Screen**

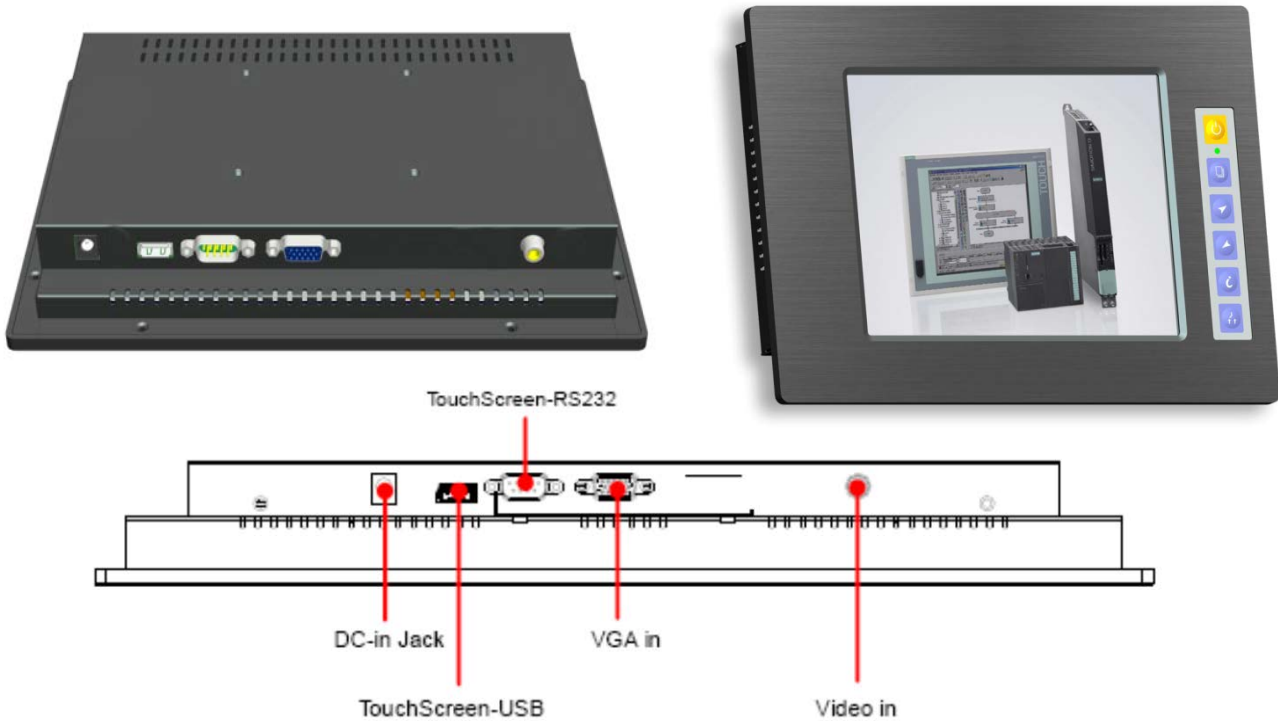

**Main Feature**

- 8" SVGA TFT LCD Panel support 800×600 pixels
- 6mm Aluminum front bezel with strengthen glass
- Rugged construction design
- Input signal : VGA + Optional: Video-In (BNC or RCA)
- OSD control keys to optimize the display
- NEMA4 / IP 65 compliant front panel
- AC 100-240V wide range external AC adapter
- Panel mounting with clip
- Meet standard VESA hole ( 75x75 mm ), support desktop stand/wall mount /swing arm mounting

Specification	
Product Model	IDPMB-08T
LCD Panel	Display Type : 8" SVGA TFT LCD Resolution : 800×600 Max. color : RGB Stripes Luminance : 250 cd/m2 View Angel : 140° (H), 120° (V) Pixel Pitch : 0.0675 x 0.2025 mm Contrast Ratio : 500 : 1 Response Time : 25 ms LED backlight lifecycle : 20,000hrs
Signal Input	VGA ( 15 pin D-sub connector ) + Video-In (BNC or RCA)
Protect Glass	3 mm strengthen glass
OSD	Brightness, Contrast, H/V Position, Color, Phase, Clock, auto tune and recall

Touch Screen ( optional )	Internal USB or RS-232 interface controller Type: Analog resistive type : 25VDC ≥ 20MΩ Resolution: continuous Light transmission: 80% or more Power consumption:<5V @1mA Surface hardness : 3H Operating force : ≤100g Life expectancy : 35 Million Operation system : Window 2000 / XP / Vista / 7 / CE, DOS , Linux
Signal Connectivity ( optional )	AV input (BNC or RCA)
DC Power Input ( optional )	Wide range DC 7V-28V input
Power Supply	Input: 100~240VAC,50/60Hz Output: DC12V@ 4A /48W ,external ac adapter
Construction	Heavy duty steel and aluminum front panel
Environment	Operating temperature: 0 °C to 50 °C Storage temperature: -20 °C to 60 °C Storage humidity: 10% to 95%, non-condensing Vibration: 17 to 500HZ 1G PTP Shock: 1G /peak( 11m sec)
Safety	CE/FCC/Rohs
Dimension W x H x D ( mm )	Dimensions: 260 x 185 x 36 mm
Weight	NET weight: 2.8KG; Gross weight: 4.5KG

### Ordering Information

IDPMB-08T	8" Industrial Panel Monitor, with Touch Screen
Optional: DC	Support DC input (7-28VDC)
Optional: AV	Support AV Input (BNC or RCA)

### Structure Diagram

