


**Model: IDPMB-17T**  
**17" Industrial Panel Monitor, with Touch Screen**

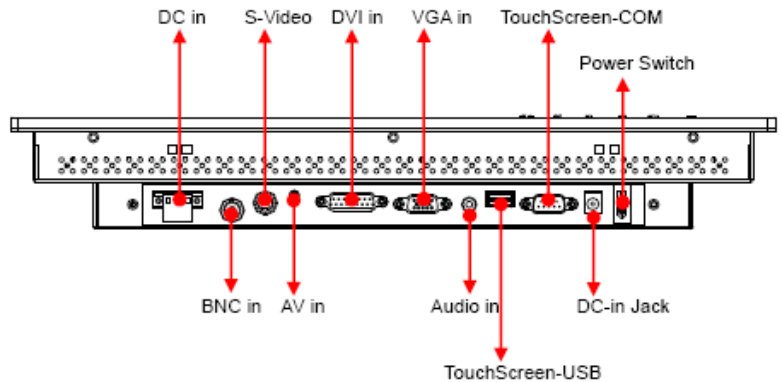

**Main Feature**

- 17" SXGA TFT LCD Panel support 1280 × 1024 pixels
- 6mm Aluminum front bezel with strengthen glass
- Rugged construction design
- Input signal : VGA + DVI + Audio
- Build in 2 x 2 Watts stereo speaker
- OSD control keys to optimize the display
- NEMA4 / IP 65 compliant front panel
- AC 100-240V wide range external AC adapter
- Panel mounting with clip
- Meet standard VESA hole ( 75x75 and 100x100 mm ), support desktop stand/wall mount /swing arm mounting

Specification	
Product Model	IDPMB-17T
LCD Panel	Display Type : 17" SXGA TFT LCD Resolution : 1280 x 1024 Max. color : 16.7M Luminance : 300 cd/m2 View Angel : 178°(H), 178°(V) Pixel Pitch : 0.264 x 0.264 mm Contrast Ratio : 1000 : 1 Response Time : 5 ms Power Consumption : 21.9W LCD MTBF : 50,000hrs
Signal Input	VGA ( 15 pin D-sub connector ) + DVI ( DVI-D ) + audio input ( audio jack )
Protect Glass	3 mm strengthen glass
Speaker	Built-in 2x stereo speakers(2watt)
OSD	Brightness, Contrast, H/V Position, Color, Phase, Clock, auto tune and recall
Touch Screen	Internal USB or RS-232 interface controller

	Type: Analog resistive type : 25VDC $\geq$ 20M $\Omega$ Resolution: continuous Light transmission: 80% or more Power consumption: <5V @1mA Surface hardness : 3H Operating force : $\leq$ 100g Life expectancy : 35 Million Operation system : Window 2000 / XP / Vista / 7 / CE, DOS , Linux
Signal Connectivity ( optional )	AV input (S-Video, RCA, BNC)
DC Power Input ( optional )	Wide range DC 7V-28V input
Power Supply	Input: 100~240VAC,50/60Hz Output: DC12V@ 4A /48W ,external ac adapter
Construction	Heavy duty steel and aluminum front panel
Environment	Operating temperature: 0 °C to 50 °C Storage temperature: -20 °C to 60 °C Storage humidity: 10% to 95%, non-condensing Vibration: 17 to 500HZ 1G PTP Shock: 1G /peak( 11m sec)
Safety	CE/FCC/Rohs
Dimension W x H x D ( mm )	Dimensions: 408x345x59.8 mm
Weight	NET weight: KG; Gross weight: KG

## Ordering Information

IDPMB-17T	17" Industrial Panel Monitor, with Touch Screen
Optional: DC	Support DC input (7-28VDC)
Optional: AV	Support AV Input (S-Video, RCA)

## Structure Diagram Unit: mm

