


Model: KSC-108COMBO / KSC-116COMBO
1U Rackmount 8 / 16 port KVM switch

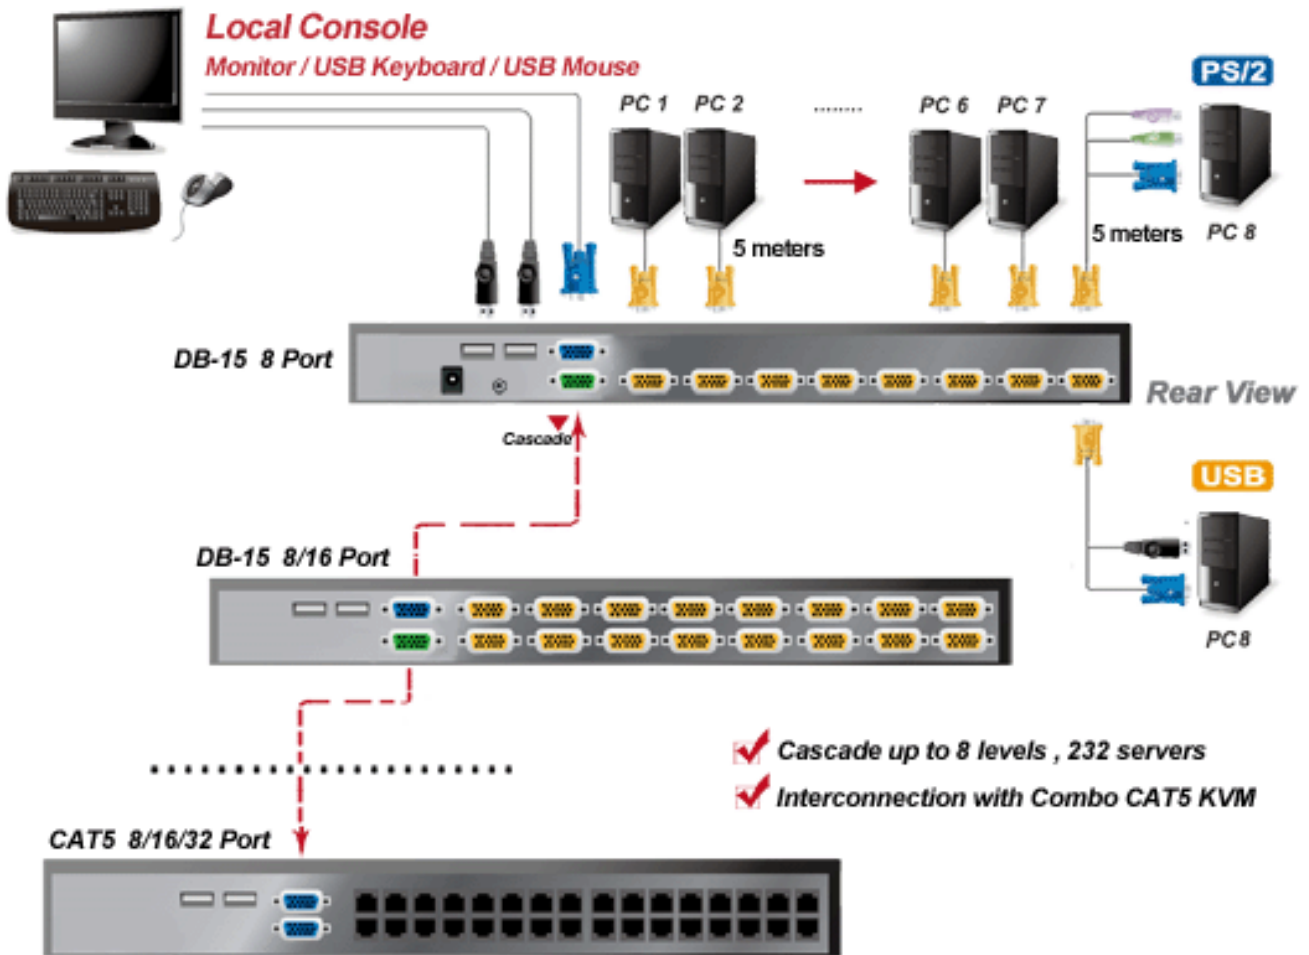

Main Feature

- Combo DB-15 KVM with 8 / 16 ports in 1U
- Support a Local USB console
- Cascade switches up to 8 levels and Mix switches between Cat5 & DB-15 KVM
- Mix PS/2,USB,SUN & MAC with Multi-Platform switch capability
- Auto scan for monitoring PCs ,easy select via push buttons, Hot keys, OSD Hot Pluggable, no software or drivers required
- Easy & quick installation

Specification		
Product Model	KSC-108COMBO / KSC-116COMBO	
KVM-Port	8 / 16 x DB-15 Female Combo connector	
KVM Cable	Combo 3-in-1 cable for PS2 server; Combo 2-in-1 cable for USB server, up to 1.8M , 3M , 5Meter ; USB to PS/2 Converter.	
Local Console	1 x DB-15 VGA (up to 1920 x 1440), 2 x USB for KB&MS	
Expansion	Support mixed Combo Cat5 or Combo DB-15 KVM, up to 232 servers	
Daisy Chain Port	1 x DB-15 Female connector	
Hot keys	Provide various hot key (Scroll-lock / Caps-lock / Num-lock / Alt-Ctrl-Win)	
Compatibility	Mix PCs, SUNs, MACs, IBMs, HPs, DELLs sverver, windows Vista/ 2003/xp / 2000, Linux, Netware, Unix	
Power	100-240VAC, 50/60HZ via AC/DC cord	
Environment	Operating Temperature	0 - 50°C
	Store Temperature	-20 -60°C
	Humidity	10% to 90%, non-condensing
Net / Gross Weight (KG)	2kg / 2.5kg	
Physical Dimensions (W x H x D)	444.4 x 128 x 43.6 mm 465 x 128 x 43.6 mm (with bracket)	
Packing Dimensions (W x H x D)	510 x 215 x 120 mm	
Certificated	CE/FCC	
Ordering Information		
KSC-108	1U Rackmount 8 port KVM switch	
KSC-116	1U Rackmount 16 port KVM switch	
KCVU-018 (optional)	USB, 2 in 1 KVM Cable , 1.8 meter length	
KCVU-030 (optional)	USB, 2 in 1 KVM Cable , 3.0 meter length	
KCVU-050 (optional)	USB, 2 in 1 KVM Cable , 5.0 meter length	
KCVP-018 (optional)	PS/2, 3 in 1 KVM Cable , 1.8 meter length	
KCVP-030 (optional)	PS/2, 3 in 1 KVM Cable , 3.0 meter length	
KCVP-050 (optional)	PS/2. 3 in 1 KVM Cable , 5.0 meter length	

Structure Diagram Unit : mm

