


Model: KVM-1708COMBO
1U Rackmount 17" TFT LCD, with 8 port KVM switch

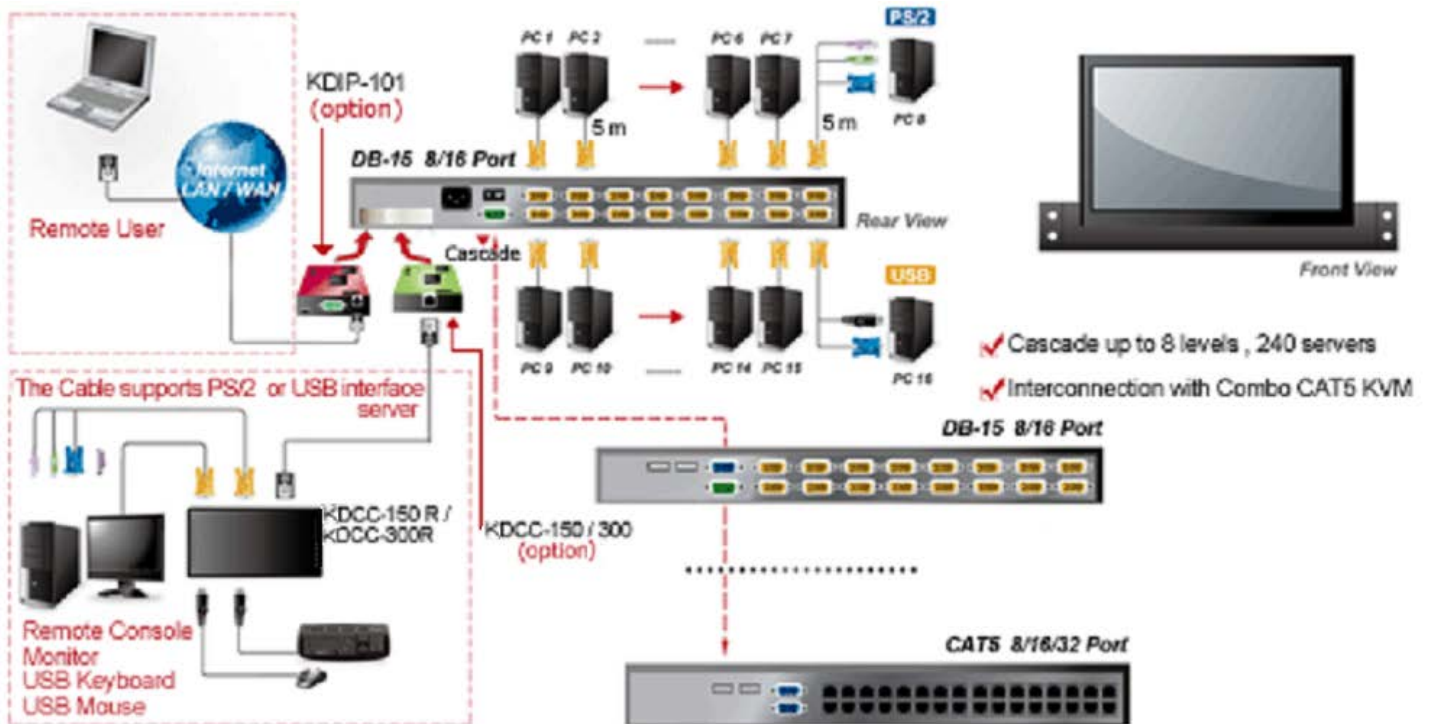

Main Feature

- One PS/2 console controls up to 16 directly connected computers
- Support an optional remote console (Cat5 based or Over-IP)
- CAT5 console up to 1000 feet away from KVM switch with superior auto-adjust RGB gain/delay control capability

- Support multiple form - PS/2 and USB computers (SUN and MAC)
- Support DOS, Windows, Netware, Unix, Linux, Mac OS
- Hot Pluggable - Add or remove connected PCs without having to power down the KVM switch or PCs.
- Superior video quality - Up To 1280 x 1024, DDC2B (Display Data Channel Standard, Level 2B)
- No software required - easy PC selection via Push Buttons, Hot Keys or OSD (on screen display)
- Support Daisy Chaining up to 7 additional units
- Auto Scan Mode for monitoring PCs
- Firmware upgradeable for staying compatible with new coming computers
- Metal case, rack mountable Support DDC2B for all ports

Specification		
Product Model		KVM-1708COMBO
LCD	Size	17" TFT
	Resolution	1280 X 1024
	Max. color	16.7M
	Luminance	300 cd/m2
	View Angel	178°(H) , 178°(V)
	Pixel Pitch	0.264 x 0.264 mm
	Contrast Ratio	1000 : 1
Computer Connections	Direct	8
	Maximum	128
Computer Port Selection		OSD , Hot Key , Push Button
Connector	Power	AC Inlet
	Computer	HDB 15 Female
	Daisy Chain	HDB 15 Female
	Console Port	Plus one Optional Modules: Selectable CAT5-Based or IP-Based Remote Console
CAT5-Based Remote Transmit / Receive Module (KDCC-300T/KDCC-300R)		RJ-45 Connector CAT5 console up to 1000 feet away from KVM switch with superior auto-adjust RGB gain/delay control capability
IP-Based Remote Console Module (KDIP-101)		RJ-45 8P8C for 10/100M Ethernet DB-9 pin male for Modem, Null modem and serial power Control Mini USB 2.0 receptacle
LEDs	Port	8
	Power	1
Button / Switch	Power Switch	Rock Switch
	LCD Adjustment	Button
Hotkey		Provide various Hotkey (Scroll-Lock/ Cap-Lock/ Num-Lock/ Alt/ Ctrl/ Win)
Auto-Scan Intervals		5 ~ 99 Sec.
Keyboard / mouse Emulation		PS/2
Video Resolution (Local Console)		1280 x 1024
Video Resolution (Remote Console)		1600 x 1200 for CAT5-Based 500 feet remote console, 1024 x 768 for CAT5-Based 1000 feet remote console, 1600 x 1200 for IP-Based remote console
Power Input Rating		100-240VAC ; 50/60Hz ; 1A
Power Consumption		37W

Environment	Operating Temperature	0-50°C
	Store Temperature	-20-60°C
	Humidity	0-80% RH , NC
Housing	Heavy Duty Steel	
Size	19" Rack mount, 1U	
Net Weight	16.1KG (1port), 16.3KG (8port), 16.7KG (16port)	
Gross Weight	20.9KG (1port), 21.1KG (8port), 21.5KG (16port)	
Dimensions (W*D*H)	447 x 580 x 42 mm	
Packing Dimensions (W*D*H)	710 x 730 x 180 mm	
Order Information		
KVM-1708COMBO	1U Rackmount 17" TFT LCD, with 8 port KVM switch	
KCVU-018 (optional)	USB, 2 in 1 KVM Cable , 1.8 meter length	
KCVU-030 (optional)	USB, 2 in 1 KVM Cable , 3.0 meter length	
KCVU-050 (optional)	USB, 2 in 1 KVM Cable , 5.0 meter length	
KCVP-018 (optional)	PS/2, 3 in 1 KVM Cable , 1.8 meter length	
KCVP-030 (optional)	PS/2, 3 in 1 KVM Cable , 3.0 meter length	
KCVP-050 (optional)	PS/2, 3 in 1 KVM Cable , 5.0 meter length	
KVM-KIT (optional)	Installation Kit for LCD KVM 15''; 17''	
KDDC-300T & KDDC-300R (optional)	CAT5-Based Remote Transmit & Receive Module - for 300 meter	
KDIP-101 (optional)	IP-Based Remote Console Module	

Structure Diagram Unit :mm

