


**Model: KVM-2401COMBO**  
**1U Rackmount 24" 1 port LCD KVM, with KVM cable - PS/2 & USB Interface**

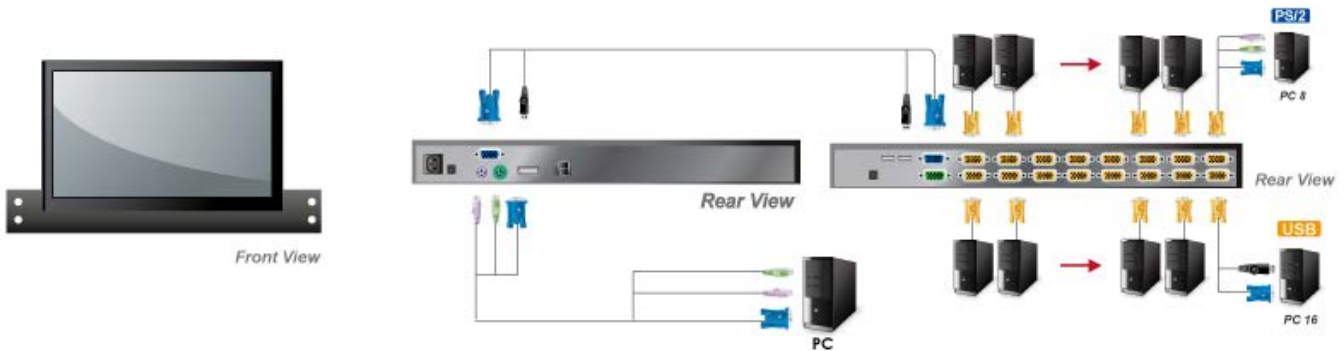

## Main Feature

- 24" Full HD LED Panel support 1920 × 1080 pixels
- Support combo interface for PS/2 & USB
- Controls one set of PC or KVM-Switch
- OSD ( on screen display ) function for LCD display
- No software & driver required - Hot pluggable
- Built-in AUTO self-locking mechanism system
- Metal case, rack mountable - Integrated 24" LED Panel with 104 keys keyboard and touchpad

Specification		
Product Model		KVM-2401COMBO
LCD	Size	24"
	Resolution	1920 X 1080
	Max. color	16.7M

	Luminance	300 cd/m2
Computer Connections	Power	AC Inlet
	VGA DB-15(Female)	1
	Keyboard MD-6 (Female)	1
	Mouse MD-6 ( Female)	1
	USB( A type )	1
Button / Switch	Power Switch	Rock Switch
	LCD Adjustment	Button
Auto-Scan Intervals		5 - 99 Sec.
Keyboard / mouse Emulation		PS/2
Power Input Rating		100-240VAC ; 50/60Hz ; 1A
Power Consumption		48W
Environment	Operating Temperature	0-50°C
	Store Temperature	-20-60°C
	Humidity	0-80% RH , NC
Housing		Heavy Duty Steel
Size		1U 19" Rack mount
Net / Gross Weight		17 / 23.5 kg
Dimensions (W*D*H)		448 x 776 x 42 mm
Packing Dimensions (W*D*H)		710 x 980 x 180 mm
<b>Order Information</b>		
KVM-2401COMBO		1U Rackmount 24" 1 port LCD KVM, with KVM cable - PS/2 & USB Interface

**Structure Diagram** Unit :mm

