

Model: RM-17T

8U, 19" Rack mount 17" TFT LCD monitor, with Touch Screen

Main Feature

- 8U, 19" Rack mount 17" TFT LCD monitor
- 17" SXGA TFT LCD Panel support 1280x1024 pixels
- Steel front bezel with strengthen glass
- Rugged construction design
- Input signal : VGA + USB / RS232 (for Touch Screen)
- OSD control keys to optimize the display
- NEMA4 / IP 65 compliant front panel




Specification	
Product Model	RM-17T
LCD Panel	Display Type : 17" SXGA TFT LCD Resolution : 1280 x 1024 Max. color : 16.7M Luminance : 300 cd/m2 View Angel : 178°(H) , 178°(V) Pixel Pitch : 0.297 x 0.297 mm Contrast Ratio : 1000 : 1 Response Time : 5 ms Power Consumption : 21.9W LCD MTBF : 50,000hrs
Signal Input	VGA (15 pin D-sub connector)
OSD	Brightness, Contrast, H/V Position, Color, Phase, Clock, Management
Touch Screen	Internal USB or RS-232 interface controller Type: Analog resistive type : 25VDC ≥ 20MΩ Resolution: continuous Light transmission: 80% or more Power consumption:<5V @1mA Surface hardness : 3H Operating force : ≤100g Life expectancy : 35 Million Operation system : Window 2000 / XP / Vista / 7 / CE, DOS , Linux
Signal Connectivity (optional)	AV input (BNC)

DC Power Input (optional)	Wide range DC 9V-28V input
Power Supply	DC12V@ 5A /60W ,external ac adapter
Construction	Heavy duty steel
Environment	Operating temperature: 32 °F-113 °F (0 °C to 45 °C) Storage temperature: -4 °F-140 °F (-20 °C to 60 °C) Storage humidity: 10% to 95%@ 40°C , on-condensing Vibration: 10 ~ 150Hz, 0.15mm 10 cycles 1G Shock: 30G peak acceleration (11 msec. duration)
Safety	CE/FCC/Rohs
Dimension W x H x D (mm)	Dimensions: 482.6x335x51mm Packing Dimension: 600x480x180mm
Weight	NET weight: 8.5KG Gross weight: 11KG
Ordering Information	
RM-17T	8U, 19" Rack mount 17" TFT LCD monitor, with Touch Screen
Optional: DC	Support DC input (9-28VDC)
Optional: AV	Support AV Input (BNC)

Structure Diagram

Unit :mm

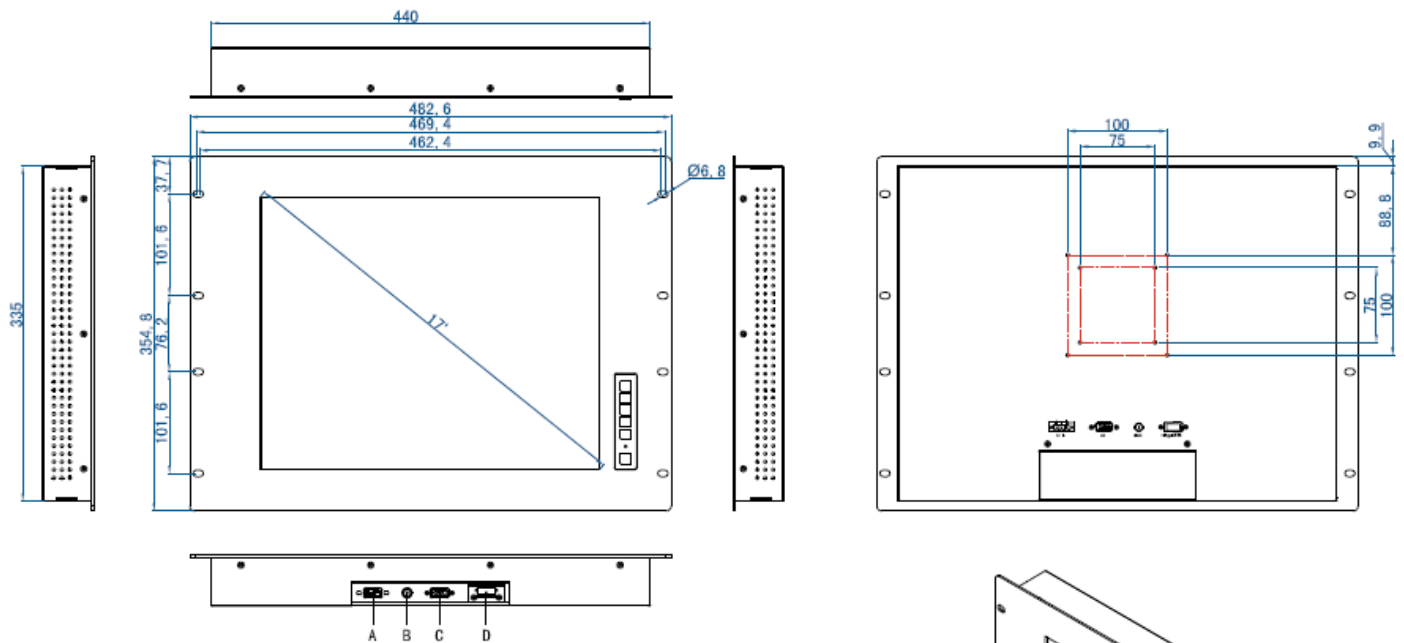

- A : USB or RS232 (for Touch Screen) B : BNC Input (Optional)
C : VGA Input D : 12 VDC Input Terminal

