


**Model: RMM-15T**  
**7U, 19" Rack mount 15" TFT LCD monitor, with Touch Screen**

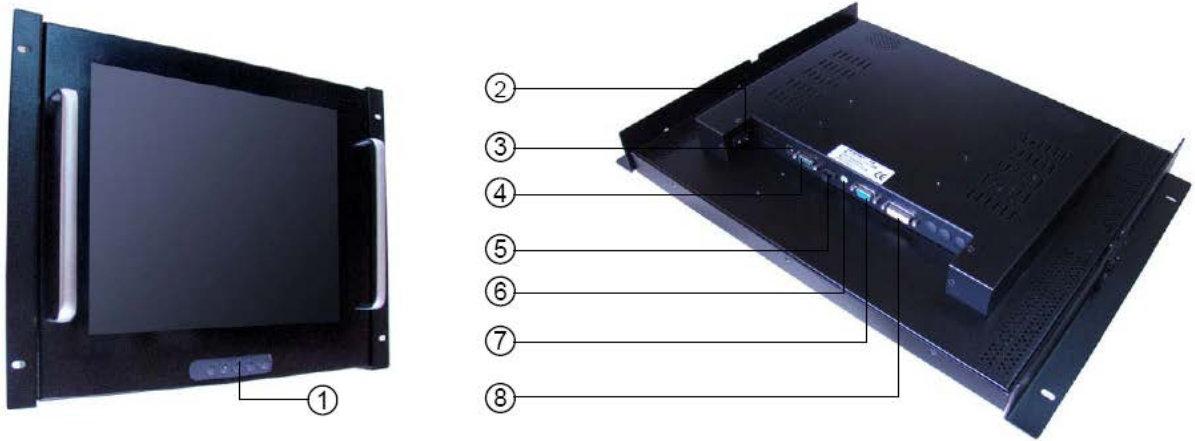

- |                 |                         |                         |           |
|-----------------|-------------------------|-------------------------|-----------|
| 1. OSD button   | 3. DC Jack              | 5. TouchScreen USB Port | 7. VGA-IN |
| 2. Power Switch | 4. TouchScreen COM Port | 6. Audio-in             | 8. DVI-IN |

**Main Feature**

- 7U, 19" Rack mount 15" TFT LCD monitor
- 90° tilt adjustment while mounted in rack: +45° ~-45°

| Specification        |  |
|----------------------|--|
| <b>Product Model</b> | <b>RMM-15T</b>   |
| <b>LCD Panel</b>     | Display Type: 15" XGA TFT LCD<br>Resolution : 1024×768<br>Max. color : 16.2M<br>Luminance : 250 cd/m2<br>View Angel : 150°(H) , 135°(V)<br>Pixel Pitch : 0.297 x 0.297 mm<br>Contrast Ratio : 700 : 1<br>Response Time : 8 ms<br>Power Consumption : 11.27W<br>LCD MTBF : 50,000hrs  |
| <b>Signal Input</b>  | VGA ( 15 pin D-sub connector ) + DVI (DVI-D) + audio input ( audio jack )  |
| <b>OSD</b>           | Brightness, Contrast, H/V Position, Color, Phase, Clock, Management  |
| <b>Touch Screen</b>  | Internal USB or RS-232 interface controller<br>Type: Analog resistive type : 25VDC ≥ 20MΩ<br>Resolution: continuous<br>Light transmission: 80% or more<br>Power consumption: <5V @1mA<br>Surface hardness : 3H<br>Operating force : ≤100g<br>Life expectancy : 35 Million<br>Operation system : Window 2000 / XP / Vista / 7 / CE, DOS , Linux |

|                                  |  |
|----------------------------------|--|
| Signal Connectivity ( optional ) | AV input (BNC)   |
| DC Power Input ( optional )      | Wide range DC 7V-28V input   |
| Power Supply                     | DC12V@ 4A /48W ,external ac adapter  |
| Speaker                          | 2x2 W Stereo internal speaker  |
| Construction                     | Heavy duty steel   |
| Environment                      | Operating temperature: 32 °F~113 °F (0 °C to 45 °C)<br>Storage temperature: -4 °F~140 °F (-20 °C to 60 °C)<br>Storage humidity: 10% to 95%@ 40°C , on-condensing<br>Vibration: 10 ~ 150Hz, 0.15mm 10 cycles 1G<br>Shock: 30G peak acceleration (11 msec. duration) |
| Safety                           | CE/FCC/Rohs  |
| Dimension W x H x D ( mm )       | Dimensions: 480.8x311.15x60mm<br>Packing Dimension: 620x440x195mm  |
| Weight                           | NET weight: 8.5KG; Gross weight: 9KG   |

### Ordering Information

|              |   |
|--------------|---|
| RMM-15T      | 7U, 19" Rack mount 15" TFT LCD monitor, with Touch Screen |
| Optional: DC | Support DC input (7-28VDC)                                |
| Optional: AV | Support AV Input (BNC)                                    |

### Structure Diagram

Unit :mm

