


**Model: RMM-17T**  
**8U, 19" Rack mount 17" TFT LCD monitor, with Touch Screen**

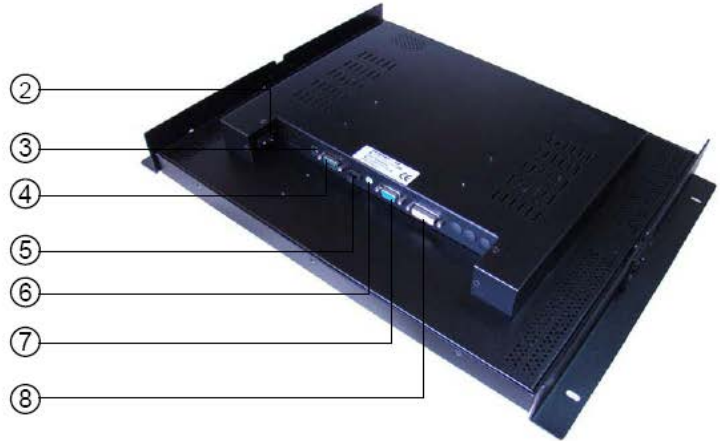

- |                 |                         |                         |           |
|-----------------|-------------------------|-------------------------|-----------|
| 1. OSD button   | 3. DC Jack              | 5. TouchScreen USB Port | 7. VGA-IN |
| 2. Power Switch | 4. TouchScreen COM Port | 6. Audio-in             | 8. DVI-IN |

**Main Feature**

- 8U, 19" Rack mount 17" TFT LCD monitor
- 90° tilt adjustment while mounted in rack: +45° ~-45°


Specification	
<b>Product Model</b>	<b>RMM-17T</b>
<b>LCD Panel</b>	Display Type : 17" SXGA TFT LCD Resolution : 1280 x 1024 Max. color : 16.7M Luminance : 300 cd/m2 View Angel : 178°(H) , 178°(V) Pixel Pitch : 0.297 x 0.297 mm Contrast Ratio : 1000 : 1 Response Time : 5 ms Power Consumption : 21.9W LCD MTBF : 50,000hrs
<b>Signal Input</b>	VGA ( 15 pin D-sub connector ) + DVI (DVI-D) + audio input ( audio jack )
<b>OSD</b>	Brightness, Contrast, H/V Position, Color, Phase, Clock, Management
<b>Touch Screen</b>	Internal USB or RS-232 interface controller Type: Analog resistive type : 25VDC ≥ 20MΩ Resolution: continuous Light transmission: 80% or more Power consumption:<5V @1mA Surface hardness : 3H Operating force : ≤100g Life expectancy : 35 Million Operation system : Window 2000 / XP / Vista / 7 / CE, DOS , Linux
<b>Signal Connectivity ( optional )</b>	AV input (BNC)

DC Power Input ( optional )	Wide range DC 7V-28V input
Power Supply	DC12V@ 4A /48W ,external ac adapter
Speaker	2x2 W Stereo internal speaker
Construction	Heavy duty steel
Environment	Operating temperature: 32 °F~113 °F (0 °C to 45 °C) Storage temperature: -4 °F~140 °F (-20 °C to 60 °C) Storage humidity: 10% to 95%@ 40°C , on-condensing Vibration: 10 ~ 150Hz, 0.15mm 10 cycles 1G Shock: 30G peak acceleration (11 msec. duration)
Safety	CE/FCC/Rohs
Dimension W x H x D ( mm )	Dimensions: 482.6x355x60mm Packing Dimension: 610x490x195mm
Weight	NET weight: 8.2KG; Gross weight: 11KG

### Ordering Information

RMM-17T	8U, 19" Rack mount 17" TFT LCD monitor, with Touch Screen
Optional: DC	Support DC input (7-28VDC)
Optional: AV	Support AV Input (BNC)

### Structure Diagram

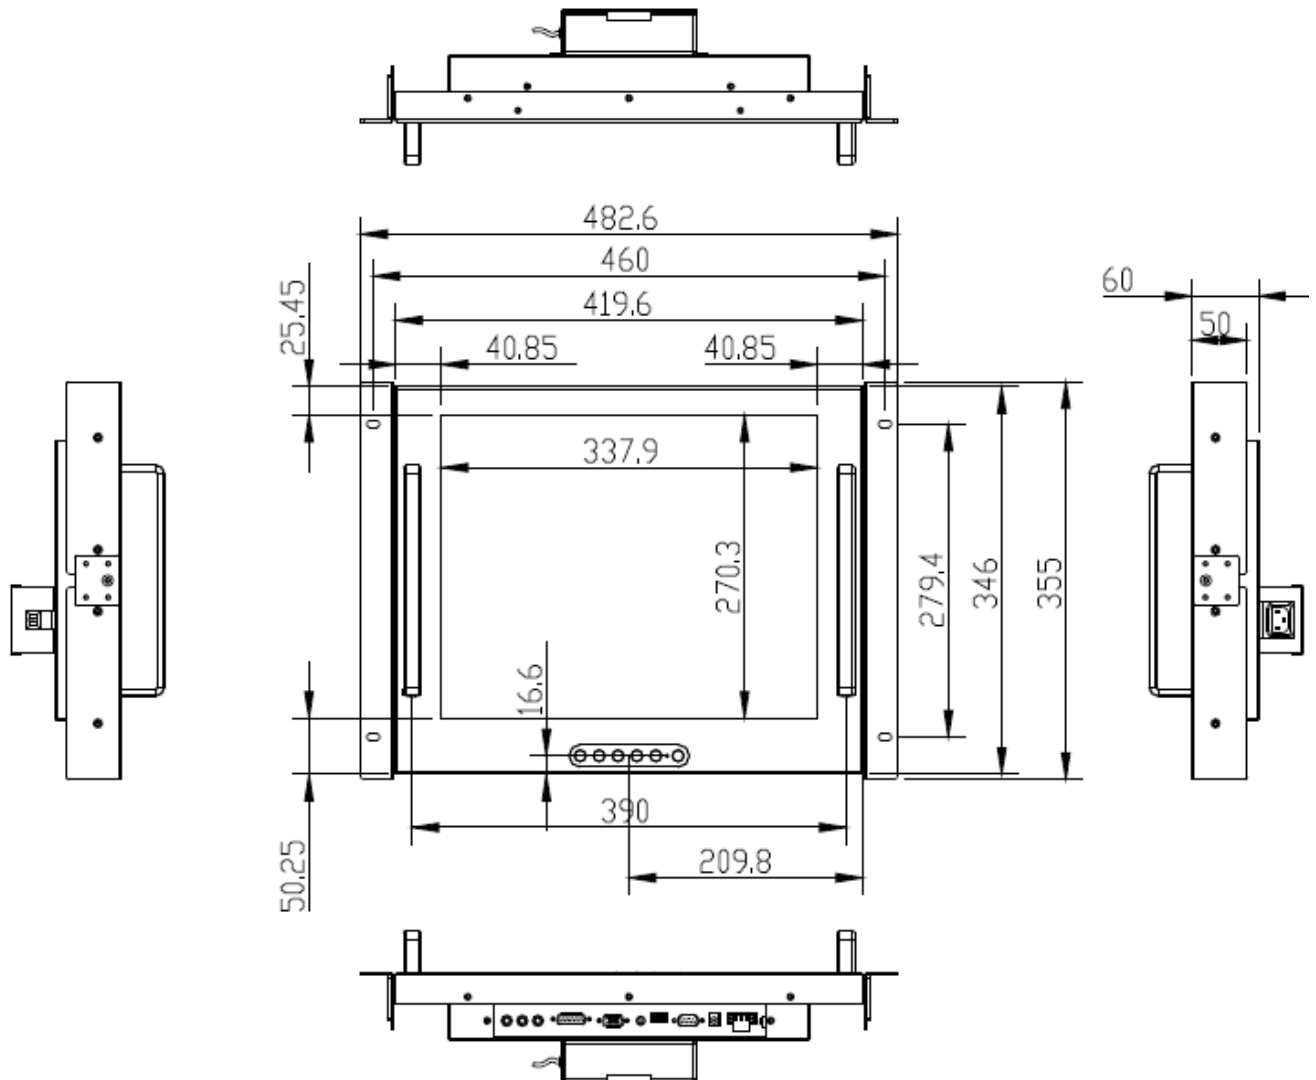

Unit :mm