
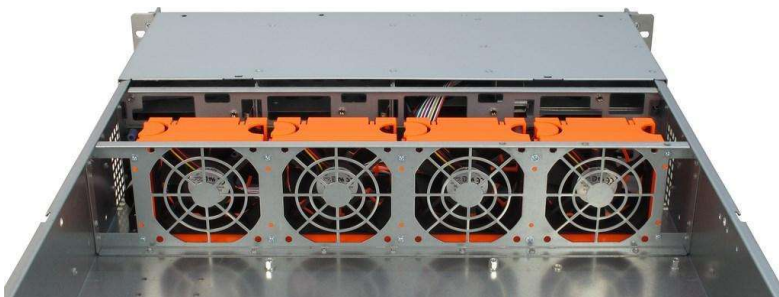
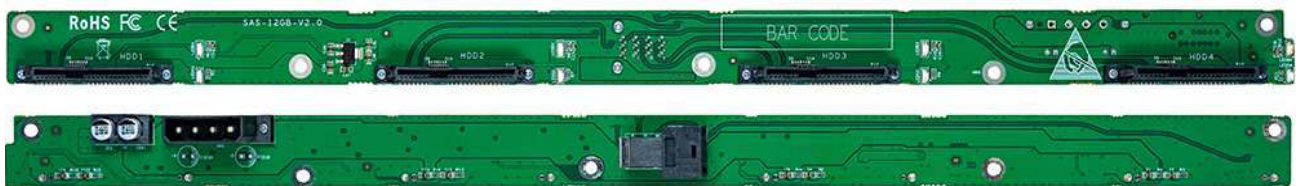


Model: 2U-IPC-2408
2U Server Case, 8 Hot-Swap SAS/SATA Drive Bay, MINI-SAS HD
backplane (SFF-8643, Max. 12Gb/s)

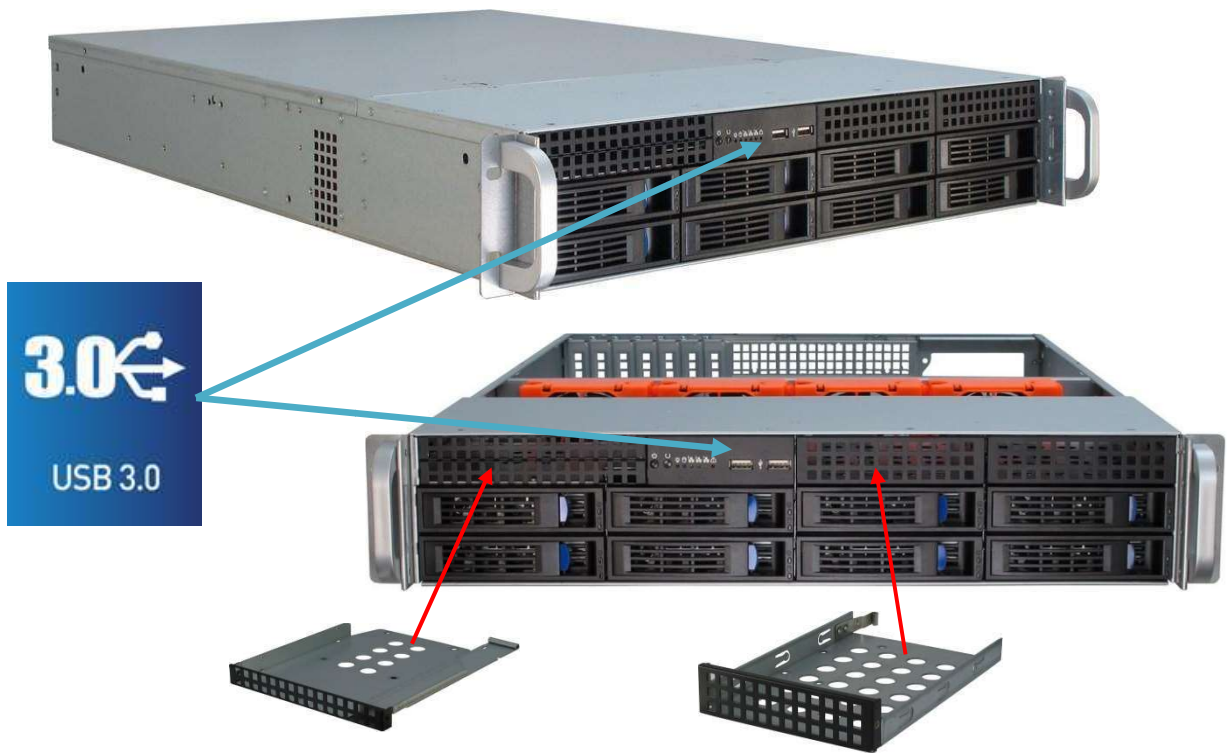

Specification

- **Form Factor:** 2U, 19" Rackmount Chassis
- **Color:** Silver and Black
- **Motherboard Support:** MINI-ITX (6.7"x6.7"), Micro ATX (9.6"x9.6"), ATX (12"x9.6"), CEB (12"x10.5"), EEB (12"x13")
- **Processor Support:** Supports dual, single Intel® / AMD processors
- **Power Supply Support:** standard 2U ATX, 1+1 Redundant
- **Dimensions (H x W x D):** 89mm x 480mm x 690mm
- **Expansion Slots:** 7
- **Drive Bay:** 8 x 2.5" / 3.5" hot-swappable SAS/SATA trays, 1 x slim DVD bay, 2 x 2.5" / 3.5" bay
- **Backplane:** 2 x SFF-8643 Mini SAS High Density connectors (Max. 12Gb/s)
- **Front Panel:** Power ON/OFF switch, System Reset switch, 2 x USB 3.0 port
- **Front LED:** 1 x Power ON, 1 x HDD activity, 3 x LAN activity, 1 x Alarm
- **System Cooling:** 4 x 80mm middle fans (Hot-swap type, Molex connector)
- **Operating Temperature:** 0/50 °C
- **Storage Temperature:** -20/60 °C
- **Storage Humidity:** 10% to 90%, non-condensing
- **Packing:** Double Carton boxes, 160mm x 560mm x 830mm (H x W x D)
- **Weight:** 10.5 Kg(net), 12.5 Kg (gross)

Optional items

- Sliding Rail (For server rack depth 800 to 1000mm)
- Telescopic Sliding Rails For server rack depth 800 to 1200mm
- 2U 600watt Power Supply Unit
- 2U 800 watt Redundant Power Supply Unit