


**Model: ICM-08T**  
**8" Industrial Chassis Monitor, with Touch Screen**

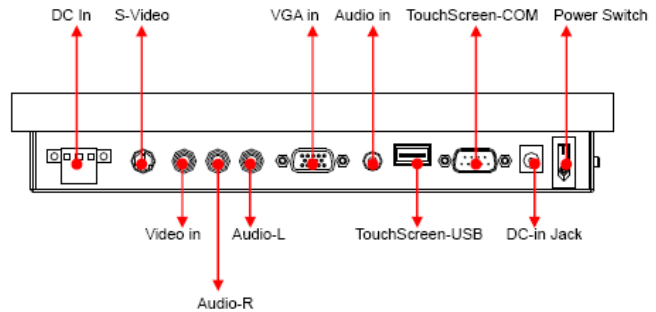

**Main Feature**

- 8" SVGA TFT LCD Panel support 800×600 pixels
- Heavy duty steel chassis with strengthen glass
- Rugged construction design
- Input signal : VGA + Audio
- OSD control keys to optimize the display
- AC 100-240V wide range external AC adapter
- Meet standard VESA hole ( 75x75 and 100x100 mm ), support desktop stand/wall mount /swing arm mounting

Specification	
Product Model	ICM-08T
LCD Panel	Display Type : 8" SVGA TFT LCD Resolution : 800×600 Max. color : RGB Stripes Luminance : 200 cd/m2 View Angel : 130°(H) , 115°(V) Pixel Pitch : 0.2025 x 0.2025 mm Contrast Ratio : 400 : 1 Response Time : 30 ms Power Consumption : 230mW LED backlight lifecycle : 20,000hrs
Signal Input	VGA ( 15 pin D-sub connector ) + audio input ( audio jack )
Protect Glass	3 mm strengthen glass
OSD	Brightness, Contrast, H/V Position, Color, Phase, Clock, auto tune and recall
Touch Screen	Internal USB or RS-232 interface controller Type: Analog resistive type : 25VDC ≥ 20MΩ Resolution: continuous Light transmission: 80% or more Power consumption:<5V @1mA Surface hardness : 3H

	Operating force : $\leq 100g$ Life expectancy : 35 Million Operation system : Window 2000 / XP / Vista / 7 / CE, DOS , Linux
Signal Connectivity ( optional )	AV input (S-Video, RCA)
DC Power Input ( optional )	Wide range DC 7V-28V input
Power Supply	Input: 100~240VAC,50/60Hz Output: DC12V@ 4A /48W ,external ac adapter
Construction	Heavy duty steel chassis
Environment	Operating temperature: 0 °C to 50 °C Storage temperature: -20 °C to 60 °C Storage humidity: 10% to 95%, non-condensing Vibration: 17 to 500HZ 1G PTP Shock: 1G /peak( 11m sec)
Safety	CE/FCC/Rohs
Dimension W x H x D ( mm )	Dimensions: 215x172x41 mm

## Ordering Information

ICM-08T	8" Industrial Chassis Monitor, with Touch Screen
Optional: DC	Support DC input (7-28VDC)
Optional: AV	Support AV Input (S-Video, RCA)

## Structure Diagram

