


Model: IDPO-156W
 15.6" flat fronted PCT touch Industrial grade monitor

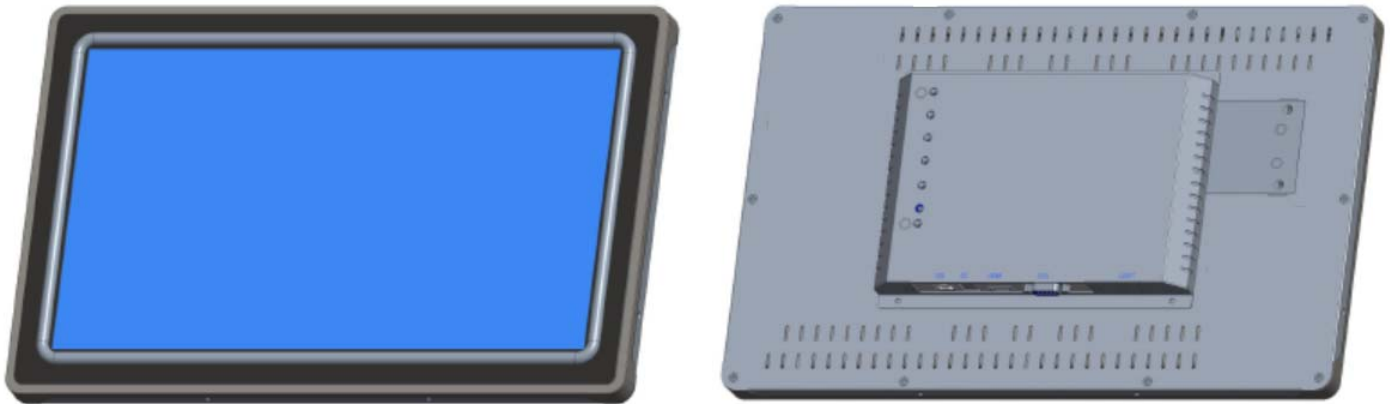

Main Feature

- 15.6" LCD wide screen panel with LED backlight for long service life
- Wide operating temperature 0 to 50° C
- Regular brightness 450 cd/m2 (Optional: upgrade to Sunlight Readable @ 1k nit)
- True flat surface , contemporary pro-flat style
- Wide viewing angle horizontally and vertically
- Open frame design, no additional enclosures or metalwork required
- Multi-touch PCT touch screen with USB interface
- Flexible signal interface: VGA & HDMI
- Four sides M4 screw mounting

| Specification | |
|---------------|--|
| Product Model | IDPO-156W |
| LCD Panel | Display Type : 15.6" Full HD Resolution : 1920 x 1080 Luminance : 450 cd/m2 (Optional: upgrade to Sunlight Readable @ 1k nit) View Angel : 178° (H), 178° (V) Maximum Color : 16.7M Contrast Ratio : 1000 : 1 MTBF : 30,000hrs |
| Signal Input | VGA + HDMI |
| OSD | Brightness, Contrast, H/V Position, Color, Phase, Clock, Auto and Source |
| Touch Screen | Internal USB interface controller - Projected Capacitive Multi Touch (10 points) Light transmission: 85% or more Surface hardness : 7H Operation system : Windows XP / 7 / 10 / 11; Linux |
| Power Supply | Input: 100~240VAC, 50/60Hz Output: DC12V@ 5A /60W , external AC adapter |
| Construction | Heavy duty steel chassis |
| Environment | Operating temperature: 0°C to 50°C |

| | |
|----------------------------|--|
| | Storage temperature: -10°C to 60°C Storage humidity: 10% to 95%, non-condensing Vibration: 5 to 500HZ 1G PTP Shock: 15G peak (11m second) |
| Dimension W x H x D (mm) | 402 x 251 x 43 |
| Ordering Information | |
| IDPO-156W | 15.6" flat fronted PCT touch Industrial grade monitor |
| Optional: DC | Support 9-36VDC Input |

Structure Diagram

