

Model: MPCX-H110-2U
 Fanless 2U Rackmount Computer with 6/7/8th Gen. Intel® Core™ i CPU Socket (LGA 1151), 4 x COM (4 x RS232), PCI-E X16 or PCI Expansion Slots



Application:

Factory Automation; Processor Automation; Intelligent Traffic Control; Vision Inspection; CCTV/DVR system; Marine / Offshore Industrial, Power Generation Control, Military system...




SPECIFICATIONS	
PRODUCT MODEL	MPCX-H110-2U
Processor	Supports 6/7/8 th Gen. Intel® Core™ / Pentium® / Celeron® processors for LGA 1151 socket
Chipset	Intel® H110
Memory	2 x DDR4 SO-DIMM Socket up to 32GB
Storage	Space for 2 x 2.5" SATA III HDD/SSD and 1 x mSATA
Audio	Realtek ALC662, 6 channel surround audio
LAN	2 x Intel® i210, Gigabit LAN Controller (Optional to 6 x GLAN)
USB port	4 x USB 2.0 and 4 x USB 2.0/3.0
Graphic	<ul style="list-style-type: none"> • 1 x VGA port Supports the highest resolution 1920X1200 @60Hz • 1 x DVI Port Supports the highest resolution 1920X1200 @60Hz • 1 x HDMI port Supports the highest resolution 4096x2160 @24Hz, 2560x1600 @60Hz
Expansive interface	2 x Mini PCI-E (full size, with SIM card slot); 1 x PCI-E X16 or PCI Slots
I/O port	2 x RJ45; 4 x USB 2.0; 4 x USB 2.0/3.0; 1 x VGA; 1 x DVI; 1 x HDMI; 1 x Lin-in / Lin-out; 4 x RS232; 1 x Power Switch; 1 x AC input
Power Supply	100 to 240V wide range AC input
Construction	Heavy duty steel and aluminum (Fanless Design)
Watch-Dog Timer	1 - 255 second programmable
Supporting OS	Windows 7/8.1/10; Linux
Environment	Operating temperature: -20 °C to 60 °C Storage temperature: -40 °C to 80 °C Storage humidity: 10% to 90% non-condensing Vibration: 17 to 500HZ 1G PTP; Shock: 1G /peak (11m sec)
Safety Certification	CE/FCC/ROHS
Dimension W x H x D (mm)	483 x 88 x 252

Ordering Information

MPCX-H110-2U	Fanless 2U Rackmount Computer
Optional - Intel Processor	Refer to "Processor List"
Optional - RAM	4 to 32GB DDR4 SO-DIMM RAM
Optional - SSD / HDD	128 GB to 2TB SSD / 500GB to 2TB 2.5" SATA HDD
Optional - OS	Windows 7 or 10 Professional , Windows 10 IoT

Structure Diagram

A: LINE OUT	E:SIM
B:MIC IN	F:4*USB2.0
C: KB/MS	G: HDD/PWR LED
D:HDMI	H: REMOTE SWITCH
	I: POWER SWITCH
	J: 2*2.5 HDD

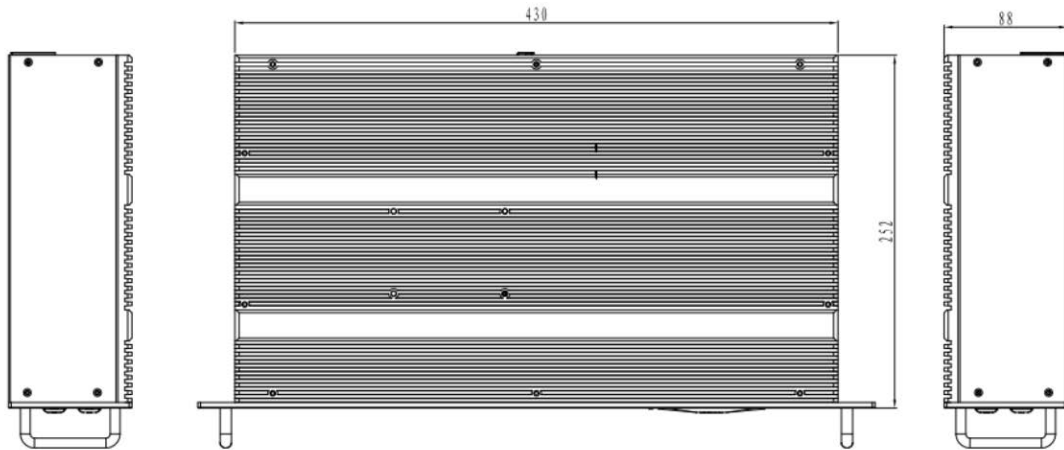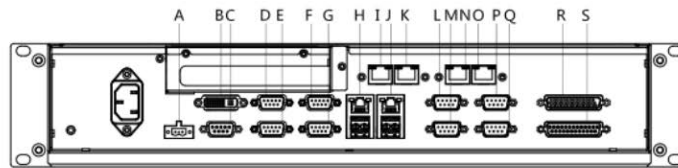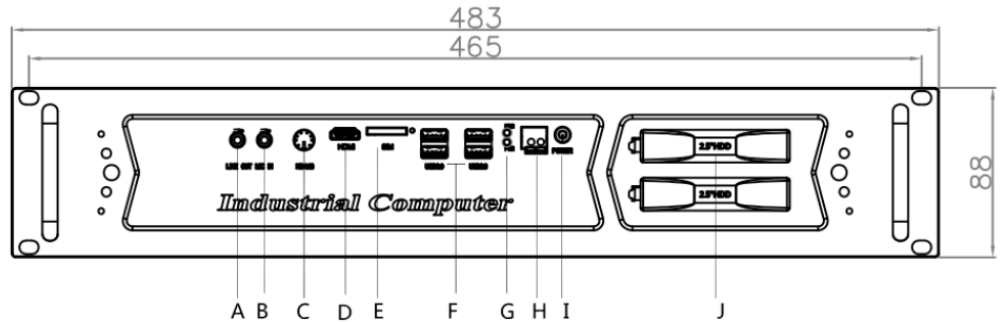

A: DC OUT 12V	H:4*USB3.0	O:LAN (optional , extension by Mini Pcle)
B:DVI	I: LAN (optional , extension by Mini Pcle)	P:COM8 (optional , extension by Mini Pcle)
C: VGA	J:2*LAN	Q:COM7 (optional , extension by Mini Pcle)
D:COM4	K:LAN (optional, extension by Mini Pcle)	R:DIO (optional)
E:COM3	L:COM6 (optional, extension by Mini Pcle)	S:LPT (optional)
F:COM2	M:COM5 (optional, extension by Mini Pcle)	
G:COM1	N:LAN (optional, extension by Mini Pcle)	

Processor List

Core Name	Processor	CPU No	CPU Speed	Cache	Wattage	GPU
Coffee Lake	Core i7	i7-8700T	2.4 - 4.0 (6 x Core)	12M	35	HDGraphics630 1150MHz
Coffee Lake	Core i7	i7-8700	3.2 - 4.6 (6 x Core)	12M	65	HDGraphics630 1150MHz
Coffee Lake	Core i5	i5-8600T	2.3 - 3.7 (6 x Core)	9M	35	HDGraphics630 1150MHz
Coffee Lake	Core i5	i5-8600	3.1 - 4.3 (6 x Core)	9M	65	HDGraphics630 1150MHz
Coffee Lake	Core i5	i5-8500T	2.1 - 3.5 (6 x Core)	9M	35	HDGraphics630 1100MHz
Coffee Lake	Core i5	i5-8500	3.0 - 4.1 (6 x Core)	9M	65	HDGraphics630 1100MHz
Coffee Lake	Core i5	i5-8400T	1.7 - 3.3 (6 x Core)	9M	35	HDGraphics630 1050MHz
Coffee Lake	Core i5	i5-8400	2.8 - 4.0 (6 x Core)	9M	65	HDGraphics630 1050MHz
Coffee Lake	Core i3	i3-8300T	3.2 (4 x Core)	8M	35	HDGraphics630 1100MHz

Coffee Lake	Core i3	i3-8300	3.7 (4 x Core)	8M	62	HDGraphics630 1150MHz
Coffee Lake	Core i3	i3-8100T	3.1 (4 x Core)	6M	35	HDGraphics630 1100MHz
Coffee Lake	Core i3	i3-8100	3.6 (4 x Core)	6M	65	HDGraphics630 1100MHz
Coffee Lake	Pentium	G5600T	3.3 (2 x Core)	4M	35	HDGraphics630 1050MHz
Coffee Lake	Pentium	G5600	3.9 (2 x Core)	4M	54	HDGraphics630 1100MHz
Coffee Lake	Pentium	G5400T	3.1 (2 x Core)	4M	35	HDGraphics610 1050MHz
Coffee Lake	Pentium	G5400	3.7 (2 x Core)	4M	58	HDGraphics610 1050MHz
Coffee Lake	Celeron	G4950	3.3 (2 x Core)	2M	54	HDGraphics610 1050MHz
Coffee Lake	Celeron	G4930T	3.0 (2 x Core)	2M	35	HDGraphics610 1000MHz
Coffee Lake	Celeron	G4930	3.2 (2 x Core)	2M	54	HDGraphics610 1050MHz
Kabylake	Core i7	i7-7700T	2.9	8M	35	HDGraphics630 1150MHz
Kabylake	Core i7	i7-7700	3.6	8M	65	HDGraphics630 1150MHz
Kabylake	Core i5	i5-7600T	2.8	6M	35	HDGraphics630 1100MHz
Kabylake	Core i5	i5-7600	3.5	6M	65	HDGraphics630 1150MHz
Kabylake	Core i5	i5-7500T	2.7	6M	35	HDGraphics630 1100MHz
Kabylake	Core i5	i5-7500	3.4	6M	65	HDGraphics630 1100MHz
Kabylake	Core i5	i5-7400T	2.4	6M	35	HDGraphics630 1000MHz
Kabylake	Core i5	i5-7400	3	6M	65	HDGraphics630 1000MHz
Kabylake	Core i3	i3-7320	4.1	4M	51	HDGraphics630 1150MHz
Kabylake	Core i3	i3-7300T	3.5	4M	35	HDGraphics630 1100MHz
Kabylake	Core i3	i3-7300	4	4M	51	HDGraphics630 1150MHz
Kabylake	Core i3	i3-7100T	3.4	3M	35	HDGraphics630 1100MHz
Kabylake	Core i3	i3-7100	3.9	3M	51	HDGraphics630 1100MHz
Kabylake	Pentium	G4620	3.7	3M	51	HDGraphics630 1100MHz
Kabylake	Pentium	G4600T	3	3M	35	HDGraphics630 1050MHz
Kabylake	Pentium	G4600	3.6	3M	51	HDGraphics630 1100MHz
Kabylake	Pentium	G4560T	2.9	3M	35	HDGraphics610 1000MHz
Kabylake	Pentium	G4560	3.5	3M	54	HDGraphics610 1050MHz
Kabylake	Celeron	G3950	3	2M	51	HDGraphics610 1050MHz
Kabylake	Celeron	G3930T	2.7	2M	35	HDGraphics610 1050MHz
Kabylake	Celeron	G3930	2.9	2M	51	HDGraphics610 1050MHz
Skylake	Core i7	i7-6700T	2.8	8M	35	HDGraphics530 1100MHz
Skylake	Core i7	i7-6700	3.4	8M	65	HDGraphics530 1150MHz
Skylake	Core i5	i5-6600T	2.7	6M	35	HDGraphics530 1100MHz
Skylake	Core i5	i5-6600	3.3	6M	65	HDGraphics530 1150MHz
Skylake	Core i5	i5-6500T	2.5	6M	35	HDGraphics530 1100MHz
Skylake	Core i5	i5-6500	3.2	6M	65	HDGraphics530 1050MHz
Skylake	Core i5	i5-6400T	2.2	6M	35	HDGraphics530 950MHz
Skylake	Core i5	i5-6400	2.7	6M	65	HDGraphics530 950MHz
Skylake	Core i3	i3-6320	3.9	4M	51	HDGraphics530 1150MHz
Skylake	Core i3	i3-6300T	3.3	4M	35	HDGraphics530 950MHz
Skylake	Core i3	i3-6300	3.8	4M	51	HDGraphics530 1150MHz
Skylake	Core i3	i3-6100T	3.2	3M	35	HDGraphics530 950MHz
Skylake	Core i3	i3-6100	3.7	3M	51	HDGraphics530 1050MHz
Skylake	Pentium	G4520	3.6	3M	51	HDGraphics530 1050MHz
Skylake	Pentium	G4500T	3	3M	35	HDGraphics530 950MHz
Skylake	Pentium	G4500	3.5	3M	51	HDGraphics530 1050MHz
Skylake	Pentium	G4400T	2.9	3M	35	HDGraphics510 950MHz
Skylake	Pentium	G4400	3.3	3M	54	HDGraphics510 1000MHz
Skylake	Celeron	G3920	2.9	2M	51	HDGraphics510 950MHz
Skylake	Celeron	G3900T	2.6	2M	35	HDGraphics510 950MHz
Skylake	Celeron	G3900	2.8	2M	51	HDGraphics510 950MHz