


Model: SLR-104T
10.4" Sunlight Readable Industrial Display with Resistive Touch

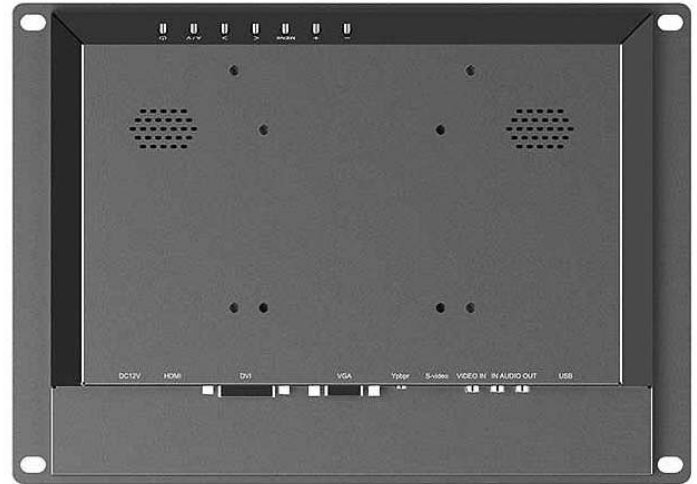

Main Feature

- LED Panel - Higher Brightness; Longer Life Span; Better Viewing Angle; Less Power Consumption ...
- 10.4" SVGA LED panel support 800x600 pixels
- Heavy-duty steel with Rugged construction design
- Industrial grade 5 wire Resistive Touch Screen
- Slim design for Panel mount / Wall mount easy installation
- Input signal : VGA + DVI + HDMI + AV (BNC) + Audio + USB
- AC 100-240V wide range external AC adapter (with 12VDC input)
- Meet standard VESA hole (75x75 & 100x100mm), support desktop stand/wall mount /swing arm mounting

Application

CCTV Monitoring; Kiosk; Digital Signage; Factory Automation; Processor Automation; Marine / Offshore Industrial ...

Specification	
Product Model	SLR-104T
LCD Panel	Display Type : 10.4" SVGA LED Panel Resolution : 800 x 600 Max. color : 16.2M Luminance : 1,000 nit View Angel : 130° (H), 110° (V) Contrast Ratio : 400 : 1 LED backlight lifecycle: 50,000hrs
Signal Input	VGA + DVI + HDMI + AV (BNC) + Audio + USB
OSD	Auto; Menu; Left; Right; Exit/Select; Power On/Off
Touch Screen	Internal USB - industrial grade 5 wire Resistive Touch controller Resolution: 4096 x 4096 Light transmission: 80% or more Surface hardness : 3H

	Operating force : $\leq 100g$ Life expectancy : 35 Million Operation system : Window 2000 / XP / Vista / 7 / 10 / 11, CE, DOS , Linux
Power Supply	Input: 12VDC AC power to DC Adapter: 100-240VAC, 50/60Hz to DC12V/2A
Construction	Heavy-duty steel chassis
Environment	Operating temperature: $-20^{\circ}C$ to $60^{\circ}C$ Storage temperature: $-30^{\circ}C$ to $70^{\circ}C$ Storage humidity: 10% to 95%, non-condensing Vibration: 50 to 500HZ 1G PTP Shock: 10G /peak(11m sec)
Safety	CE/FCC/Rohs
Dimension W x H x D (mm)	287 x 203 x 39 mm
Ordering Information	
SLR-104T	10.4" Sunlight Readable Industrial Display with Resistive Touch

Structure Diagram

