

Model: TPC-5186W
Modular 18.5" HD LED LCD with 5/6th Gen. Intel® Core™ i3/i5/i7 Multi-Touch Panel Computer



Main Feature

- LED Panel - Higher Brightness; Longer Life Span; Better Viewing Angle; Less Power Consumption ...
- 18.5" HD LED Panel support 1366x768 pixels
- Intel 5/6th Gen Intel® Core™ U-series (i3/i5/i7)
- 8mm Aluminum Magnesium Alloy front bezel
- NEMA4 / IP 65 compliant front panel, with Rugged construction design
- Front flat glass (7H Hardness) with projected capacitive Multi Touch Screen
- Supports 10 points multi-touch in Windows 7/8.1/10...
- 2 x RS232/485 (with surge protection, auto flow control - for RS485)
- (Optional - WIFI) Mini PCI-E WIFI Module with Antenna
- Panel (Flush) mounting with clip
- Meet standard VESA hole (100 x 100mm), support desk top stand / wall mount / swing arm mounting


Application:

- Factory Automation; Processor Automation; Power Generation; Marine / Offshore Industrial; Kiosk ...

Specification	
Product Model	TPC-5186W
CPU	Intel® Celeron® Processor 3855U Processor (Dual Core, 1.6GHz, 2M Cache)
Chipset	Intel® SOC integrated
Memory	1 x DDR3L SO-DIMM Socket up to 8GB
Storage	1 x 2.5" SSD/HDD drive bay, 1 x mSATA (full size)

Display	Display Type : 18.5" HD <u>LED Panel</u> LCD Resolution : 1366 x 768 Luminance : 250 cd/m2 View Angel : 170° (H), 160° (V)
Audio	Realtek ALC662 6 channel HD Audio, Line-Out
LAN	2 x Intel® i210-IT GbE LAN
USB port	4 x USB 3.0/2.0
Display output	Intel® HD Graphics 510/520, Max. resolution @ 1920 x 1200, with VGA + DVI output
Expansive interface	2 x Mini PCI-E (full size, with SIM Holder) <u>Optional (Expansion card):</u> 4 x RS 232/485 <u>Optional (Expansion card):</u> 16 x DIO (Isolated, 8 Input & 8 Relay Output)
Back panel I/O port	2 x RJ45, 4 x USB 3.0/2.0, 1 x VGA, 1 x DVI, 1 x Lin-out, 2 x RS232/485, 1 x Power Switch, 1 x PS2 (KB & Mouse), DC input terminal (12-24VDC)
Supporting OS	DOS; Windows 7/8.1/10; Linux
Touch Screen	Internal USB interface controller - Projected Capacitive Multi Touch (10 points) Light transmission: 85% or more Surface hardness : 7H Operation system : DOS; Windows XP / 7 / 8.1 / 10; Linux
Wireless LAN (optional)	MINI PCI-E WIFI Module with Antenna
Construction	Heavy duty steel and aluminum front panel
Environment	Operating temperature: -10 °C to 60 °C Storage temperature: -20 °C to 80 °C Storage humidity: 10% to 90% non-condensing Vibration operate SSD: 3 Grms, IEC 60068-2-64, random, 5-500 Hz, 1 hr/axis Shock operate SSD: 30 G, IEC 60068-2-27, half sine, 11 ms duration
Compliance	CE; FCC; ROHS
Dimension W x H x D (mm)	480 x 304 x 79
Ordering Information	
TPC-5186W	Modular 18.5" HD LED LCD Multi-Touch Panel Computer, with Intel® Celeron® Processor 3855U Processor (Dual Core, 1.6GHz, 2M Cache), onboard 4GB RAM
(Optional) i5-5300U	upgrade processor to Intel® Core™ i5 5300U (Dual Core, 2.3 to 2.9GHz, 3M Cache)
(Optional) i7-5500U	upgrade processor to Intel® Core™ i7 5500U (Dual Core, 2.4 to 3.0GHz, 4M Cache)
(Optional) i5-6200U	upgrade processor to Intel® Core™ i5 6200U (Dual Core, 2.3 to 2.8GHz, 3M Cache)
(Optional) eCOM4	4 x RS 232/485 Expansion card
(Optional) eDIO16	64GB 16 x DIO (Isolated, 8 Input & 8 Relay Output)Expansion card
(Optional) AC to DC Adapter	12VDC/60watt Power Adapter, input 110-240VAC
(Optional) RAM	4 to 8GB DDR3L SO-DIMM RAM
(Optional) SSD / HDD	64GB to 2TB 2.5''SSD, 500GB to 2TB 2.5'' SATA HDD
(Optional) OS	DOS, Windows 7 / 8.1 / 10 Professional, Linux

Structure Diagram (Panel cut-off dimension: 463 x 287mm)

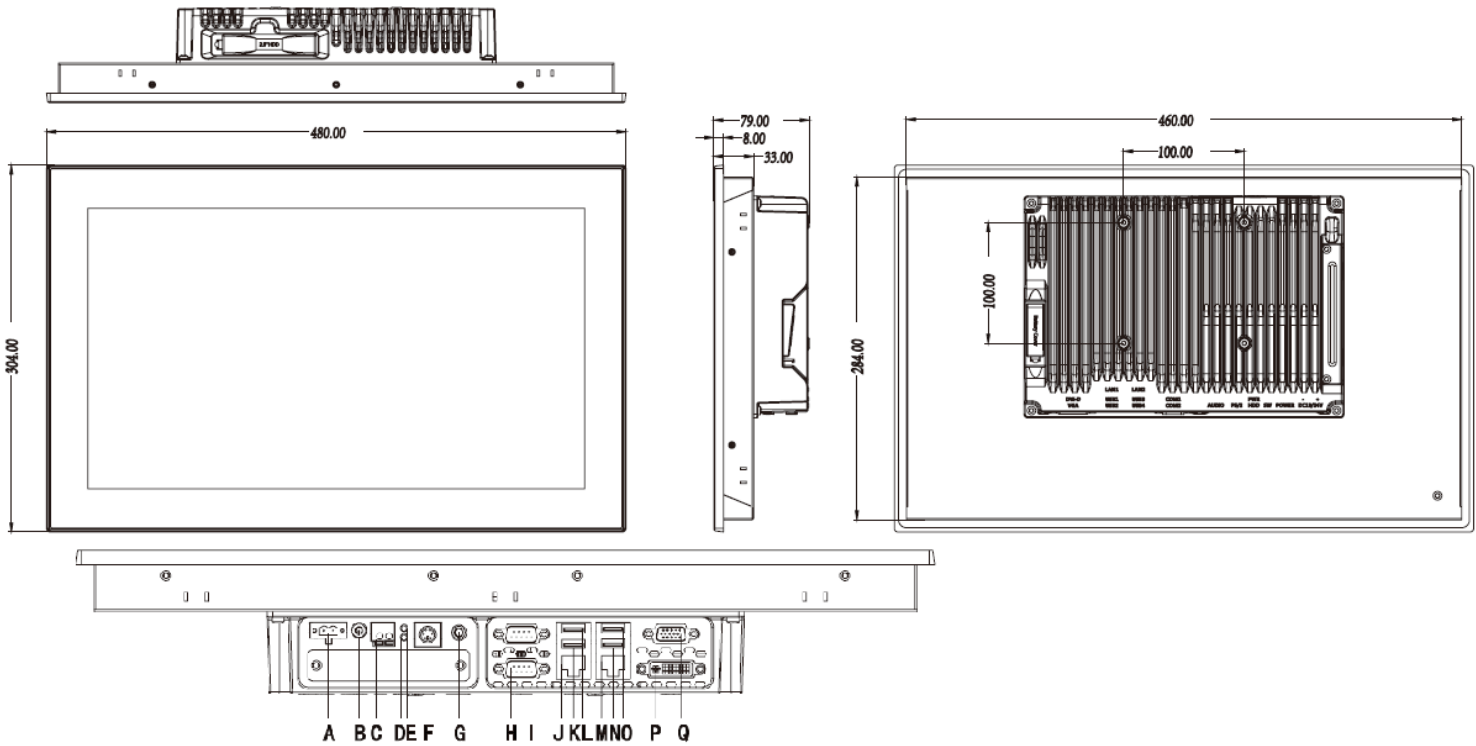

- | | | |
|---------------------|------------------------|-------------------------|
| A: DC Input | B: Power Switch | C: Remote Switch |
| D: PWR LED | E: HDD LED | F: PS2 |
| G: Audio Out | H: COM 1 | I: COM 2 |
| J: GLAN 2 | K: USB 3.0/2.0 | L: USB 3.0/2.0 |
| M: GLAN 1 | N: USB 3.0/2.0 | O: USB 3.0/2.0 |
| P: DVI | Q: VGA | |