


**Model: IDPMB-50WHD**  
**50" Industrial Panel Monitor (Wide Screen)**

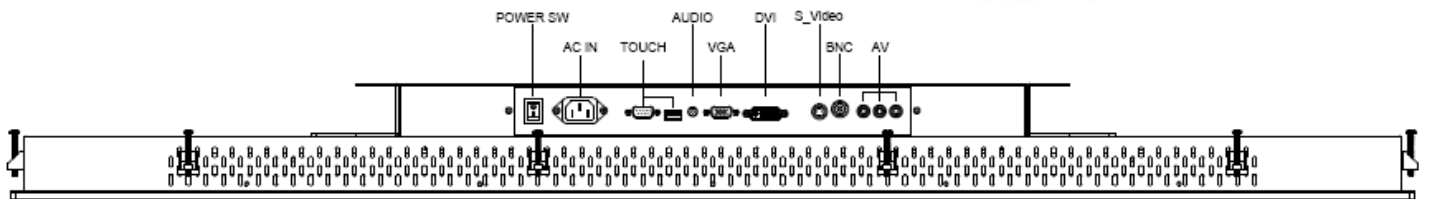

**Main Feature**

- 50" Full HD LED Panel support 1920 × 1080 pixels
- 6mm Aluminum front bezel with strengthen glass
- Rugged construction design
- Input signal : VGA + DVI + Audio
- Build in 2 x 8 Watts stereo speaker
- OSD control keys to optimize the display
- IP 65 compliant front panel
- AC 100-240V wide range power input
- Panel mounting with clip, and wall mount bracket included, Meet standard VESA hole

Specification	
Product Model	IDPMB-50WHD
LCD Panel	Display Type : 50" Full HD TFT LCD Resolution : 1920 x 1080 Max. color : 1.07G Luminance : 400 cd/m2 View Angel : 168°(H), 168°(V) Pixel Pitch : 0.1903 x 0.5708 mm Contrast Ratio : 5000 : 1 Response Time : 6.5 ms Power Consumption : 92 Watt LCD MTBF : 50,000hrs
Signal Input	VGA ( 15 pin D-sub connector ) + DVI (DVI-D) + audio input ( audio jack )
Protect Glass	3 mm strengthen glass
Speaker	Built-in 2x stereo speakers(8 watt)

OSD	Brightness, Contrast, H/V Position, Color, Phase, Clock, PIP, Auto tune and recall
Signal Connectivity ( optional )	AV input (S-Video, RCA, BNC)
Power Supply	Input: 100~240VAC,50/60Hz, Output: 24V/6A+12V/3A 180Watts internal power board
Construction	Heavy duty steel and aluminum front panel
Environment	Operating temperature: 0 °C to 50 °C Storage temperature: -20 °C to 60 °C Storage humidity: 10% to 95%, non-condensing Vibration: 17 to 500HZ 1G PTP Shock: 1G /peak( 11m sec)
Safety	CE/FCC/Rohs
Dimension W x H x D ( mm )	Dimensions: 1205 x 715 x 100 mm

## Ordering Information

IDPMB-50WHD	50" Industrial Panel Monitor (Wide Screen)
Optional: AV	Support AV Input (S-Video, RCA, BNC)

## Structure Diagram

Unit: mm

