

Model: MIPM-15T
15" Marine Industrial Panel Monitor, with Touch screen (VGA +DVI + S-Video + AV input)

Main Feature

- Dimming knob control backlight brightness from nearly 0% to 100%
- Front IP65 aluminum bezel with powder coating
- Wide range DC8-30V power input with Lockable connector (AC Power in option)
- Front hardness AR glass protection (touch option)
- Build in 2 x 2 watts stereo speaker
- IP65 Front OSD Design , Ease for use front OSD control
- Enhanced anti-shock and vibration resistance design
- Meet standard VESA hole (75 x 75mm and 100 x 100mm)
- Panel (Flush) mount ,VESA and bracket mount




| Specification | |
|------------------------------|--|
| Product Model | MIPM-15T |
| LCD Panel | Display Type : 15" XGA TFT LCD Screen resolution (Pixels) : 1024 × 768 Brightness : 250cd/m2 Contrast Ratio : 700 : 1 Pixel Size : 0.297*0.297 Max Color : 16.2M Viewing angle : 150° (H) , 135° (V) Response Time : 8 ms LCD MTBF : 50,000hrs |
| Mechanical and Environmental | Power Control : Front Power On/Off via Front Button OSD control : Front on screen display control Mounting : Panel (Flush) mount ,VESA and bracket mount Dimensions (WxHxD) : 375 x 300 x 58 mm Weight : Net 6kg Operating Temperature : 0 °C to 50 °C Storage temperature : -20 °C to 60 °C Storage humidity : 10% to 90%non-condensing Anti-Vibration : 5Hz-500 HZ / 1G PTP Anti-Shock : 15G / Peak(11m sec) |
| Available Options | Touch Screen : Resistive Type / Capacitive / IR / SAW AC Power input : 100 to 240 V AC Bracket mount : Stand and roof mount / Rotary bracket / Sun Visor bracket |
| Input Signals | RGB Signal : D-SUB 15P connector(female) Composite Audio/Video : RCA plug S-Video Signal : S-Video (SVHS) plug DVI-D Signal : DVI-D input 24pin connector DC Power Signal : 5.8mm DC Jack with Lockable AC Power Signal (Option) : Standard IEC Inlet Touch Screen RS-232 (Optional) : D-SUB 9P connector (female) Touch Screen USB (Optional) : USB-A connector (female) |

| | |
|-----------------------------|---|
| Power Specifications | DC Input : 8-30V DC to DC power input with Lockable connector |
| Certification and Approvals | CE/FCC/Rohs Certification: IEC60945 |


Ordering Information

| | |
|------------------|--|
| MIPM-15T | 15" Marine Industrial Panel Monitor, with Touch screen (VGA +DVI + S-Video + AV input) |
| Optional: SR-BKT | Mounting bracket for stand and roof mount |
| Optional: RT-BKT | Rotary bracket |
| Optional: SV-BKT | Sun Visor bracket |

Mechanical Drawing with Robust Bracket (options)

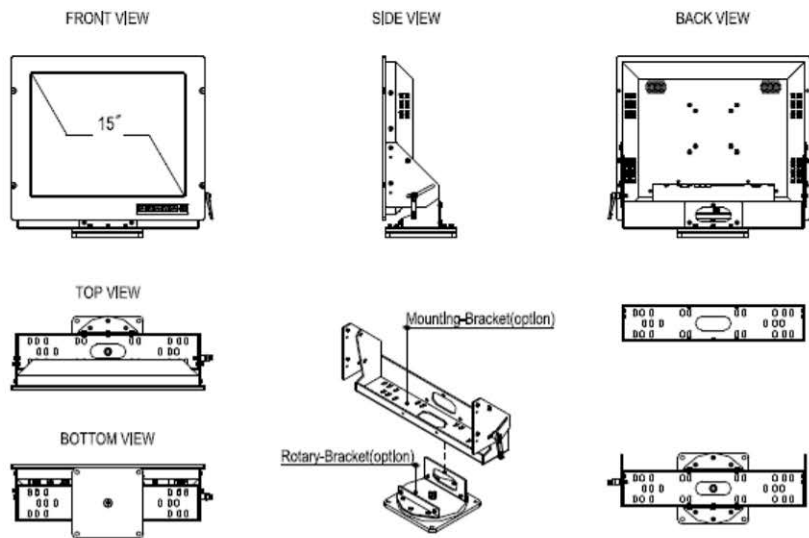

Stand/Roof Mount + Robust Bracket

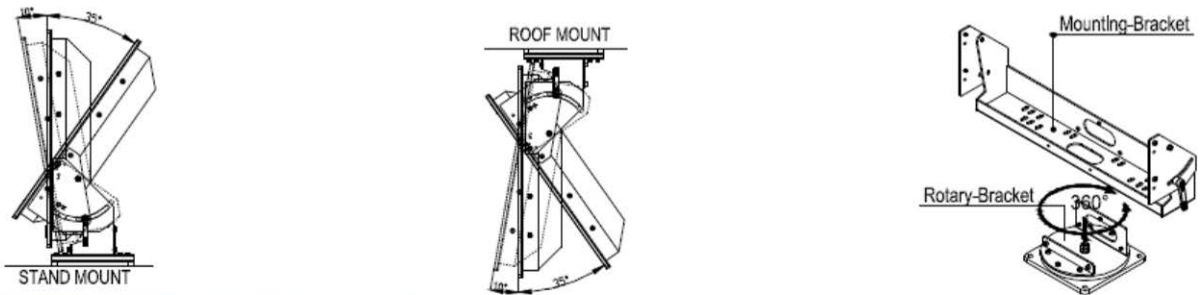

Sun Visor Bracket

